

iSocket® GSM 706



# Smart Power Socket



GSM Remote Control  
Temperature Monitoring  
GSM Alarm System

Monitor your house, save energy, save money

Control equipment  
via cell phone



- Remote on/off, reboot by SMS/Call
- Temperature value provided by SMS
- Alarm SMS/Call notification
- Remote sound monitoring
- Scheduling on/off, status info
- Thermostat, activate on/off
- Second relay output
- Three security levels



Control  
temperature remotely

### Description

iSocket® Intelligent devices are designed to control electrical equipment remotely. iSocket devices can also be used for monitoring your premises (security and, temperature monitoring, for example). They can provide valuable information about the state of the premises via the mobile network. iSocket GSM 706 is designed to switch electrical equipment remotely and has some additional useful features. This smart socket is controlled via the GSM network using standard mobile phone SMS-commands. It is also possible to activate operations by a phone call. SIM-cards from different GSM-operators - including prepaid cards - can be installed in iSocket GSM 706. iSocket GSM 706 can also be used as a thermostat because of its built-in thermometer, which controls the turning on and off of equipment according to your settings. iSocket GSM 706 sends information about the temperature in the room to your phone. With a special connector, you can connect the various sensors. A message will be sent when it is triggered. For example, it can indicate motion, doors opening, fire, gas leakage and more. A built-in microphone allows you to hear what is happening in the room, remotely. Additional output can trigger low-voltage equipment.



iSocket gives you a choice of 3 security settings to choose from. You can control security by password or by a number list or a combination of both at the same time. Limitation of time for configuring the device is an additional third level of protection.



Additional output (Microrelay 24VDC/2A)

SIM SIM-card socket

Input for sensors



Additional information about this and other iSocket® models can be found on website [www.isocket.eu](http://www.isocket.eu)

iSocket® GSM 706



# Smart Power Socket

## GSM Remote Control Temperature Monitoring GSM Alarm System



### Monitor your house, save energy, save money

save energy




Built-in  
Thermostat



Built-in  
Microphone



Horn

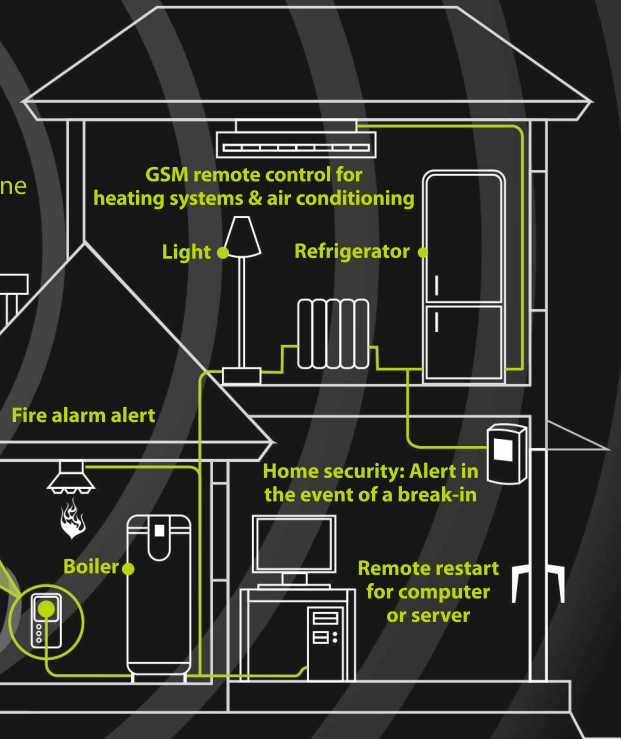

### Technical Data

Product / Model	iSocket GSM 706 / ISGSM706US, Plug/Socket: NEMA 5-15
Power Input	100-250VAC, 50-60Hz
Main relay	Switching up to 16A/120VAC, protected by 15A fuse
Microrelay	Switching up to 24VDC/2A, no fuse (3.5mm mini-jack at the rear of device)
Alarm input for sensors	For external sensors (motion, door switch, fire, etc.), provide 12VDC/300mA, fuse
GSM	4 bands: 850Mhz/900Mhz/1800Mhz/1900MHz, integrated strip antenna
SIM socket	Push-push type, plug-in SIM card 3V
Temperature Control	Built-in thermometer and thermostat, temperature measurement provided by SMS, activate on/off equipment in accordance with thermostat settings
Indicators	POWER (green), GSM (blue), MICROPHONE (yellow), OUT (red)
Security	Password, list of phone numbers, limited configuration interval
Management and Main Features	SMS control and configuration, call control, manually switching Turn on/off or restart of 120VAC appliances via main relay Turn on/off of appliances up to 24VDC via micro relay Temperature measurement provided by SMS Alarm notification by actuation of external sensors Scheduling turn on/off, status info, Alarm Function on/off
Weight Nett/Gross	0.570lb / 0.8lb
Operation conditions	14-122 Fahrenheit, Indoor use, dry conditions

Additional information about this and other iSocket® models can be found on website [www.isocket.eu](http://www.isocket.eu)